

TX-RZ800 7.2-Channel Network A/V Receiver

BLACK SILVER











































Focused Power with Masterful Sound Control

The all-new TX-RZ800 is designed for today's audiophile: separate amp and processing blocks, custom high-current transformer, custom capacitors, Asahi Kasei 384 kHz/32-bit DAC, discrete low-impedance amp circuitry, and a 32-bit digital signal processor to extract every drop of performance from DTS:X™ and Dolby Atmos® soundtracks. The high-current amp grips the speaker drivers with steady control for effortlessly clear sound that extends down to 5 Hz without phase shifting, meaning you enjoy a perfectly focused audio image and earth-shaking bass. Combine this with original Vector Linear Shaping Circuitry™ (VLSC) technology—which cleanses the signal of pulse noise—and you have a receiver that just begs to be turned up to THX® Reference levels, whether you're playing an object-based movie soundtrack over the latest spec HDMI® terminals or an album wirelessly over AirPlay. The TX-RZ800 adds pure sonic excitement to the latest in UltraHD entertainment.

HIGHLIGHTS

- Latest DTS:X[™] and Dolby Atmos[®] Compatible
- THX® Select2™ Plus Certified Power
- 185 W per Channel
- Ultra-Low-Frequency Reproduction for Dynamic Bass
- Hi-Current Amp Design for Authentic Sound Reproduction
- HDMI® 8 In / 2 Out Including I Front (4K UltraHD / HDCP 2.2 / 4:4:4 Color Space)
- Bluetooth Audio / Wi-Fi® with Spotify, Deezer, and AirPlay
- DSD 5.6 MHz, FLAC 192 kHz/24-bit Hi-Res Audio Capable
- 384 kHz/32-bit Hi-Grade DAC

ADVANCED FEATURES

- Supports New DTS:X™ and Dolby Atmos® Formats for Exciting Multidimensional Sound
- THX® Select2™ Plus Certified for Cinema Reference Sound
- 4K/60 Hz, 4:4:4 Color Space, and HDCP 2.2 Capable HDMI® Terminals for UltraHD Entertainment*1
- Zone 2 HDMI Output for 4K Video in a Second Room*2
- · Zone 2 Digital Audio and Network Audio Output
- Built-in Wi-Fi® and Bluetooth Technology for Wireless LAN and Audio Streaming
- Three-Stage Inverted Darlington Circuitry on All Channels
- Customized Capacitors and Transformer for High Current and Ultra-Low-Frequency Reproduction
- VLSC™ Technology for Noise-free Signal Path

- Pure Direct Analog Path Mode for Interference-free Hi-Fi
- Stereo Listening
 Internet Radio and Music Streaming Subscription Services Included (TuneIn Radio, Spotify, and Deezer)
- Airplay Compatible
- Play Comparisher
 Play Compressed, Lossless, and Hi-Res Audio via Local Network
 (MP3, WMA, WMA Lossless, FLAC, WAY, Ogg Vorbis, AAC,
 Apple Lossless, DSD 5.6 MHz, LPCM*4, and Dolby® TrueHD)
- · AccuEQ Room Calibration with Mic for Clear and Balanced Sound
- Advanced Music Optimizer to Improve Compressed Digital Audio Quality (Bluetooth Included)
- Control and Stream with Free Onkyo Remote Streaming Apps for iPod touch/iPhone*s and Android Devices*6
- Bi-Amping Capability for Front Channels
- Powered Zone 2 and Zone 2 Pre/Line-Out and Zone 3 Line-Out for Distributed Audio Playback
- Whole House Mode for Synchronized Housewide Audio

*** I FUND THE PROPERTY OF THE

AMPLIFIER FEATURES

- 185 W/Ch (6 Ω , 1 kHz, 1% THD, 1 Channels Driven, IEC); 230 W/Ch (6 Ω , 1 kHz, 1 Channels Driven, JEITA) WRAT (Wide Range Amplifier Technology), H.C.P.S. (High Current Power Supply) Massive High-Power Transformer, VLSC, and Discrete Output Stage Circuitry
- PLL (Phase Locked Loop) Jitter-Cleaning Circuit Technology for S/PDIF Audio

PROCESSING FEATURES

- AK4458 384 kHz/32-bit DAC (8 Channels x I)
- 32-bit Digital Signal Processing Engine
- 4 DSP Modes for Gaming: Rock, Sports, Action, and RPG
- Theater-Dimensional Virtual Surround Function
- · Direct Mode and Pure Audio Mode

CONNECTION FEATURES

- 8 HDMI Inputs (I Front/7 Rear), Main, and Zone 2 Outputs
- Mass Storage Class USB Memory Playback Capability
- . Component Video Switching (2 Input and 1 Output)
- 3 Composite Video Inputs (3 Rear) and I Output
- 5 Digital Audio Inputs (3 Optical and 2 Coaxial)
- 9 Analog Audio Inputs (9 Rear)
- Phono Input (MM) for Turntable Connection
- IR Input, I2 V Trigger Out (Assignable), and RS232 Port
- 2 Parallel Subwoofer Pre-Outs

OTHER FEATURES

- Independent Crossover Adjustment for Each Channel (40/50/60/70/80/90/100/120/150/180/200 Hz)
- A/V Sync Control (Up to 500 ms in 5 ms Steps at 48 kHz)
- Graphical Overlaid On-Screen Display (OSD) via HDMI
- . Hybrid Standby Function with HDMI Passthrough
- 40 FM/AM and 40 Internet Radio Station Presets
- Certified with DLNA Version 1.5
- RIHD (Remote Interactive Over HDMI) for System Control
- Aluminum Front Panel and Volume Control Knob
- Preprogrammed RI (Remote Interactive) Remote Control

TX-RZ800 7.2-Channel Network A/V Receiver

Ultra-Low-Frequency Hi-Current Amp Design

Backed by 70 years' experience building amplifiers and high-grade audio components, the TX-RZ800 reproduces ultra-low frequencies down to 5 Hz so you can feel the bass impact in your chest. Our high-current amplification system also enhances control of the speakers for accurate and dynamic sound.



Non-Phase-Shift Amp for Realistic Audio Imaging

Wide Range Amp Technology (WRAT) prevents phase shifting by pushing the roll-off point higher than the listening level frequency. Amplifying sound without phase shift creates an uncommonly clear. well focused, and realistic audio image.



VLSC™ for Noiseless Audio Processing

Onkyo developed Vector Linear Shaping Circuitry (VLSC) to reassemble the signal in its original form following processing. Unlike conventional filters, VLSC completely removes pulse-noise generated in D/A conversion, allowing the sound wave to be reproduced with extremely high fidelity.



HDMI® 8 In / 2 Out Including I Front (4K UltraHD / HDCP 2.2 / 4:4:4 Color)

HDMI terminals support 4K/60 Hz video as well as HDCP 2.2 for next-generation UltraHD streaming and broadcasting.

DTS:X™and Dolby Atmos® Support

DTS:X is a next-generation object-based surround-sound technology that includes height to deliver a fully immersive listening experience in your living room, DTS:X provides the ultimate in flexibility, immersion, and interactivity. Dolby Atmos transports you from an ordinary moment into an extraordinary experience with captivating, multidimensional sound that fills your room and

flows all around you to move your mind, body, and soul.



THX®-Certified Amp Quality

THX certification guarantees the same high-volume, for screen-to-seat viewing distances of 3-4 m.



Premium 384 kHz/32-bit DAC for Hi-Res Audio

Onkyo A/V receivers are engineered for universal Hi-Res playback including DSD 5.6 MHz and 192 kHz/24-bit FLAC files. A top-quality AK4458 DAC from Asahi Kasei extracts the best possible performance from any format for transparent, lifelike sound.





Bluetooth Audio, Wi-Fi®, and AirPlay with Spotify

Stream virtually any audio to your home cinema with zero hassle. Available internet radio and music subscription services include Spotify and many more.

SPECIFICATIONS

Power Output	
All Channels	185 W/Ch
	(6 Ω, I kHz, I%THD, I Channel Driven, IEC
	230 W/Ch
	(6 Ω, I kHz, I Channel Driven, JEITA)
Dynamic Power	300 W (3 Ω, Front)
	250 W (4 Ω, Front)
	150 W (8 Ω, Front)
THD+N (Total Harmon	ic Distortion + Noise)
	0.08% (20 Hz–20 kHz, Half Power)
Damping Factor	Over 40 (Front, I kHz, 8 Ω)
Input Sensitivity and Imp	
, , , ,	200 mV/47 kΩ (Line)
	3.5 mV/47 kΩ (Phono MM)
Rated RCA Output Leve	el and Impedance
	1.0 V/470 Ω (Pre Out)
	I.0 V/470 Ω (Subwoofer Pre Out)
	100 mV/2.2 kΩ (Zone Out)
	I.0 V/2.2 kΩ (Zone Pre Out)
Phono Overload	70 mV (MM, 1 kHz, 0.5%)
Frequency Response	5 Hz-100 kHz/+1 dB, -3 dB (Direct Mode)
Tone Control	±10 dB, 20 Hz (Bass)
10110 00111101	±10 dB, 20 kHz (Treble)
Signal-to-Noise Ratio	106 dB (Line, IHF-A)
oignai-to-i voise ivado	80 dB (Phono MM, IHF-A)
•••••	4 Ω = 16 Ω

Video Section

nput Sensitivity/Output Level and Impedance		
Video	I.0 Vp-p/75 Ω (Component Y)	
	0.7 Vp-p/75 Ω (Component PB/CB, PR/CR)	
	1.0 Vp-p/75 Ω (Composite)	

Component Video Frequency Response

5 Hz-100 MHz/+0 dB, -3 dB

Tuner Section

FM		87.5 MHz-108 MHz
		87.5 MHz-107.9 MHz (Taiwan Model)
AM		530 kHz=1,710 kHz
		522 kHz=1.611 kHz

530 kHz–1,710 kHz (Taiwan Model) FM/AM Preset Memory

OCITICI AI	
Power Supply	AC 220~240 V, 50/60 Hz AC 120 V~, 60 Hz

No-Sound Power Consumption 90 W

Standby Power Consumption


Dimensions (W \times H \times D)	435 x 201.5 x 433.5 mm
	(Height 261.5 mm with antennas raised)
Weight	17 kg

CARTON

Dimensions (W x H x D)	582 x 317 x 521 mm
Weight	20.5 kg

Supplied Accessories

- Indoor FM antenna
 AM loop antenna
 Speaker setup microphone Instruction manual
 Remote controller
 AA (R6) batteries × 2

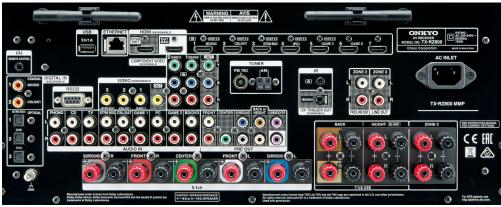

Due to a policy of continuous product improvement, Onkyo reserves the right to change specifications and appearance without notice.THX, the THX logo, and Select2 are trademarks of THX Ltd.THX and the THX logo are registered in the U.S. and other jurisdictions. All rights reserved. Manufactured under license from DOBy Laboratories. Doby, Atmos, and the double-D symbol are trademarks of Doby Laboratories. For DTS patents, see http://patents.dis.com. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, DTS in combination with the Symbol, DTSX, and the DTSX logo are registered trademarks or trademarks of DTS, inc. in the United States and/or other countries. © DTS, inc. All Rights Reserved. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Prone, iPod, iPod classic, iPod nano, iPod shuffle, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this device with iPod or iPhone may affect wireless performance. Android is trademark of Google Inc. The BluetoothTM word mark and logos are owned by the Bluetooth SIG, Inc. WRAT, Music Optimizer, Theater-Dimensional, VLSC, and AccuEQ are trademarks of Onkyo Corporation. All other trademarks and registered trademarks are the property of their respective holders.

