



Masters M12 Digital Preamp DAC



Built for the future, the M12 isn't a typical DAC and it isn't a typical preamplifier. The M12 is an ultra-high resolution digital audio hub that boasts a full roster of audiophile-grade features that leverage some of the most advanced digital audio thinking on earth. 24/192 Asynchronous USB offers modern connectivity options from any source imaginable. And NAD's DirectDigital™ processing and a Class-A buffer guarantee real-time, 24-bit accuracy from the very first to the very last bit. The M12 interfaces with all digital or analogue musical sources, and renders them perfectly to power amplifiers and active loudspeakers.

MDC Modular
Design
Construction



> NAD DirectDigital™ Innovation

DirectDigital™ amplification offers the highest level of performance. The 35-bit data path with 24-bit coefficients and 62-bit accumulation, and dithered truncation back to 35-bits after DSP functions guarantee the overall 24-bit accuracy. With this degree of resolution, all preamp functions can be accomplished with a new level of precision, and all in the digital domain. This eliminates the noise and distortion prone to analogue circuits. Because of the super high resolution, even 24-bit files are processed without truncation or loss of information.

> Uncompromised Connection




Standard inputs include AES/EBU, Asynchronous 24/192 USB, coaxial and optical digital inputs and balanced and single-ended line level inputs including a high performance MC/MM phono stage. Rounding out the picture, a pure Class-A buffer using the latest generation of Super OP Amps provide low impedance balanced and single-ended connections to power amplifiers or active loudspeakers. A remote controls all functions and IR repeaters, 12V triggers, and a serial port to make integration with advanced control systems a snap.

> Fine Tune Your System

Because of the massive computing power and high-resolution signal path, some interesting features have also been incorporated to further perfect the listening experience. Want to add a subwoofer to your system? The M12 includes a second order high pass and low pass crossover with selectable frequency. You can even select different frequency knees for each filter. This level of flexibility and precision is made possible by our highly perfected DirectDigital architecture.

> Future Forward MDC

One of NAD's most innovative technological advancements—Modular Design Construction (MDC)—does away with obsolescence by providing a simple upgrade path to add future features and functionality. M12 owners can add an optional DD HDM-1 HDMI Module with 3 inputs and 1 output (3D video pass-through) and/or a network audio module, DD BluOS, with music management software that is controlled with an iOS or Android device. The DD BluOS MDC Module allows streaming of a variety of music services, HD streaming from a NAS device, and TuneIn radio; plus it gives you full control of your music library. Integrated WiFi/Ethernet and aptX Bluetooth™ connections are also offered with the DD BluOS Module.

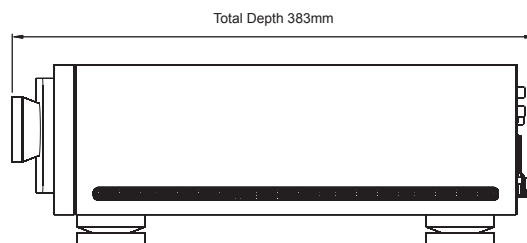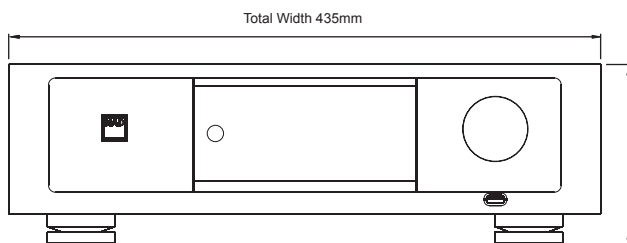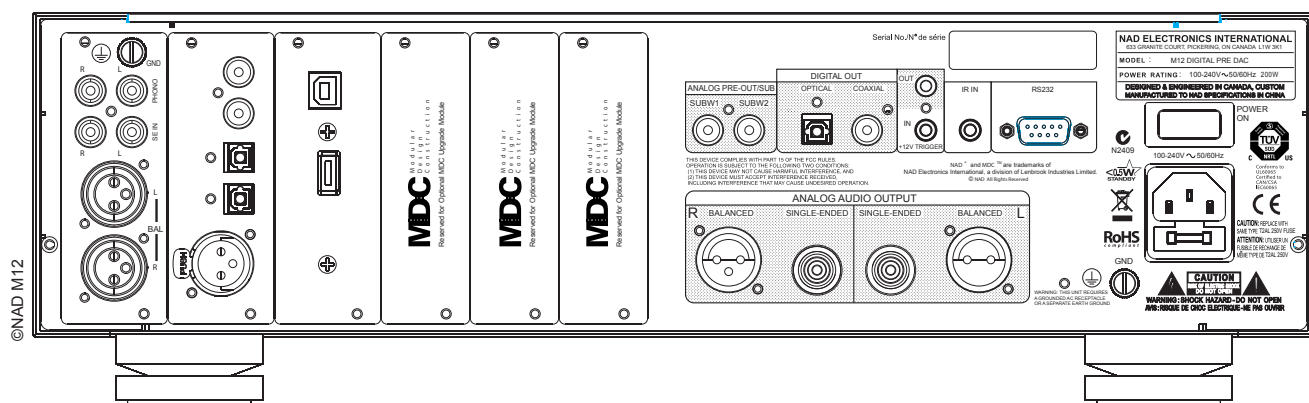

Specifications

DIGITAL INPUT (COAXIAL, OPTICAL, USB)		M12
Rated Distortion (THD+N with AES 17 filter)		<0.0005% (0dBFS)
IMD Distortion		0.0001%
Input Impedance		75 ohms (coaxial) 110 ohms (AES/EBU)
Sample Rate		32kHz to 192kHz (USB and digital S/PDIF)
Frequency Response		±0.5dB (ref. 20Hz-22kHz @ sample rate)
Channel Separation		>-115dB (ref. 0dBFS Volume -1dB)
Signal / Noise Ratio		>-125dB (ref. 0dBFS 2V out)
Output Level		2V (ref. input 0dBFS)
INPUTS/OUTPUTS		
XLR - AES/EBU		
S/PDIF		Coaxial x 2 Optical x 2
USB Class 2 Audio: asynchronous 24/192 support		
DD AP-1 Analogue Phono Module		
IR In		
Trigger In		12V ±20%
Trigger Out		12V ±20%
GENERAL		
Idle Power		26W
Standby Power		<0.5W
Unit Dimensions (WxHxD) - Gross*		435 x 133 x 383mm 17 1/8 x 5 1/4 x 15 1/8 inches**
Net Weight		8.1kg (17.9lb)
Shipping Weight		14.5kg (32.0lb)

* Gross dimensions include feet, extended buttons and rear panel terminals.

** Non-metric measurements are approximate. NAD Electronics will not assume any liability for errors being made by retailers, custom installers, cabinet makers, or other end users based on information contained in this document.

Note: Installers should allow a minimum clearance of 55mm for wire/cable management.

NAD

NAD Electronics International reserves the right to change specifications or features without notice. NAD is a registered trademark of NAD Electronics International. All rights reserved. No part of this publication may be reproduced, stored, or transmitted in any form whatsoever without the written permission of NAD Electronics International. © 07/14 14-031 NAD Electronics International.

www.NADelectronics.com