

Supplemental to New Product Information (SNPI)**NT-505**

USB DAC/Network Player

**Dual monaural USB DAC/Network Player supporting DSD512 and PCM32/768****■ Main functions**

- Hi-Res audio playback supporting DSD512 (22.6MHz) and PCM 768kHz/32-bit PCM
- Dual monaural circuit design with a high-end AKM VERITA AK4497 DAC on each channel
- Supports MQA decoder and music subscription services (TIDAL and Qobuz) and is Roon-ready
- DSD128 (5.6MHz) and PCM 192kHz/24-bit Network streaming from NAS/PC
- 5 types of PCM digital filters and 2 types of DSD digital filters
- Up-conversion up to 24.5MHz DSD and 384kHz/32-bit PCM
- Dual on-board clocks for 44.1kHz and 48kHz frequencies, and 10MHz external clock input
- Bluetooth® receiver supporting LDAC™ and Qualcomm® aptX™ HD
- TEAC-HCLD output buffer circuit and TEAC-QVCS volume control for high quality sound
- "Bulk Pet" USB transfer technology, with four transfer modes to vary sound character *1
- Free TEAC HR Audio Player and TEAC HR Streamer app

*1 "Bulk Pet" is a registered trademark of Interface Corporation.



Brand	TEAC	
Series	Reference 505	
Model	NT-505-B	NT-505-S
Color	Black	Silver
UPC Code	043774 033348	043774033355
EAN Code	4907034 221806	4907034 221813
Date of Launch	February, 2018	March, 2018
Estimated Market Price	JPY168,000 (tax excluded)	
Product Dimensions (W x H x D) / NW	290 × 81.2 × 248.7 mm / 11.4" x 3.2" x 9.8" 3.9 kg / 8.6 lbs.	
Package Dimensions (W x H x D) / GW	440 × 190 × 340 mm / 17.3" x 7.5" x 13.4" 5.3 kg / 11.7 lbs.	
Qty. per Master Carton	1	

Supplemental to New Product Information (SNPI)

■ Product overview

The NT-505 is a flagship dual monaural USB DAC with versatile network playback capabilities. It successfully incorporates the latest network technologies, along with TEAC's decades of accumulated audio design experience, in an attractive package with an A4-sized footprint.

Like its predecessor (the NT-503) it employs a dual monaural circuit design to process audio signals with even greater purity, with the latest VERITA AK4497 DAC chip used on each of the two channels. This improves the S/N (signal to noise) ratio by processing each channel individually in monaural mode, as well as delivering DSD512 (22.5MHz) native and 768kHz/32-bit PCM playback capabilities.

The analogue section, which is one of the keys to sound quality, includes four TEAC-HCLD buffer amp circuits that allow different drive modes, – fully-balanced drive for balanced output, and parallel drive mode for unbalanced output – to achieve enhanced acoustic expression.

On the network audio side, the NT-505 supports high-quality music subscription services, namely TIDAL and Qobuz, and is Roon Ready. There's also a built-in MQA decoder, and you will enjoy unlimited music content on the Internet thanks to its high-quality digital and analogue processing technologies.

In addition to a wide range of digital and analogue inputs, a Bluetooth® receiver supporting LDAC™ and Qualcomm® aptX HD™ allows you to stream high-quality audio wirelessly from your smartphone to this flagship USB DAC.

The NT-505 is a compact and high-spec USB DAC and network player that supports the latest Hi-Res formats and online music subscription services.

For the ultimate digital-to-analogue performance

• High-performance VERITA AK4497 DACs supporting DSD512 and PCM32/768

The NT-505 employs the latest VERITA AK4497 (developed by Asahi Kasei Microdevices) on each of the left and right channels. It is a highly-regarded high-end audio DAC, and supports DSD512 (22.5MHz) and 768kHz/32-bit PCM formats, achieving industry-leading ultra low distortion levels. OSRD (Over-sampling Ratio Doubler) technology, meanwhile, significantly reduces out-of-band noise. As a result, the NT-505 has the refinement necessary to make the most of Hi-Res formats, successfully processing information that lies outside the audible range.

* The AK4497 is the flagship product of the Asahi Kasei Microdevices Audio4pro™ family, which has been developed for professional audio equipment and high-end digital audio.



VELVET SOUND

All for the ultimate Real Live Sound
lead a new era of High-resolution audio

768kHz/32bit Stereo
Premium DAC
AK4497
Next Generation Flag-ship
Premium D/A Converter : VERITA series

VERITA
AK4497EQ
AKM

The image is a composite of two parts. On the left, a black and white photograph of a person's face with their eyes closed, wearing headphones, with the text 'VELVET SOUND' and 'All for the ultimate Real Live Sound lead a new era of High-resolution audio'. On the right, a black background featuring a close-up of the AK4497 DAC chip, with text describing its capabilities: '768kHz/32bit Stereo Premium DAC', 'AK4497', 'Next Generation Flag-ship', and 'Premium D/A Converter : VERITA series'.

Supplemental to New Product Information (SNPI)

- **Dual monaural circuit design and fully-balanced design**

A dual monaural circuit configuration is used throughout, from the power supply (including power transformers), to the D/A converters in the digital section and the analogue output stage. From the high-performance VERITA AK4497 D/A converters to the massive toroidal-core power transformers, each element is configured for single channel processing. This prevents mutual interference effects while reproducing a rich acoustic expressiveness.

In addition, the analogue audio signals of both the left and right channels are processed in full balanced mode soon after the D/A converters all the way to the output terminal, contributing to an improved S/N ratio and extended dynamic range. This allows the fantastic sense of air that Hi-Res formats possess to be processed and conveyed without any losses.

- **Supports TIDAL and Qobuz music subscription services, and is Roon Ready**

Connecting to your home network via a LAN cable, the NT-505 allows you to access Hi-Res music libraries on available music servers and computers, as well as hundreds of millions of CD-quality tracks on Internet via music subscription services like TIDAL and Qobuz.

The NT-505 is also a Roon Ready product that enables Hi-Res audio streaming thanks to its high-performance D/A converters.

*Roon Ready is scheduled to be deployed in the near future.



- **MQA decoder for master quality streaming**

In order to achieve an analogue waveform closer to the original signal, the NT-505 supports MQA decoding while also supporting high sampling rate Hi-Res formats like DSD512 and PCM32/768. The MQA decoder is a totally new technology that controls analogue waveforms with excellent precision (as fine as 5 microseconds) and it reproduces sound in a manner that is perceived to be as close as possible to the original (to human hearing).

Furthermore, a high-efficiency compression algorithm makes huge Hi-Res audio files compact in size, so you will be able to enjoy Hi-Res audio sources regardless of the speed of your Internet connection.



※*MQA Ready is scheduled to be deployed in the near future.

- **High-quality wireless audio streaming via Bluetooth®**

In addition to conventional SBC and AAC codecs, the NT-505 also supports LDAC™ (24/96 Hi-Res audio transmission), and Qualcomm® aptX™ HD, a codec that uses 24/48 format transmission. These allow you to playback playlists on your smartphone and tablet wirelessly.



Supplemental to New Product Information (SNPI)

- **Hi-Res audio playback from USB flash drive**

The USB port on the front panel allows you to playback Hi-Res audio formats including DSD128 (5.6MHz) and PCM 24/192.

- **Dual onboard clocks for 44.1k and 48kHz, and an external clock input**

Instead of referencing to an unstable and noisy PC clock during USB audio playback, a more accurate and on-board clock is generated by a high-precision, low phase-noise, audio-grade crystal oscillator for USB asynchronous transfer mode. The NT-505 accommodates two on-board clocks exclusively for 44.1kHz and 48kHz sampling frequencies and applies the appropriate one to incoming digital signals – those that are multiples of 44.1k or 48k – to reproduce identical sound to the original by eliminating jitter effects on the audio signal.

In addition, an external 10MHz clock input is also provided, to synchronise with an even higher-precision master clock generator, such as the TEAC CG-10M, for yet further upgraded audio playback with excellent sound quality.



- **Up-conversion up to 384kHz/32-bit PCM and 24.5MHz DSD**

Employing RDOT-NEO (Refined Digital Output Technology NEO), a fluency algorithm that renders digital audio signals smoothly, the NT-505 up-converts PCM digital signals up to 384kHz/32-bit PCM and 24.5MHz DSD. With the up-conversion function activated, you will hear an improvement in quality, even with music that you are familiar with.



- **“Bulk Pet” USB transfer technology for enhanced audio quality**

When transferring large volumes of digital data for Hi-Res audio sources through USB cables using conventional isochronous transfer mode, large variations can occur in the processing loads of the sending computer and the receiving USB DAC. This can cause sound to drop out and other problems to occur.

However, with our new USB transmission technology – dubbed “Bulk Pet” – a fixed amount of data is transmitted constantly, levelling out the processing burden on both devices and contributing to stable data transmission. Changing the processing burden on the computer directly affects audio quality so users can select the setting they prefer (from four transmission modes).

*“Bulk Pet” is a registered trademark of Interface Corporation.

For more information about “Bulk Pet,” please visit the Interface Corporation website.

https://www.itf.co.jp/prod/audio_solution/bulk-pet

Supplemental to New Product Information (SNPI)**• More digital filters than previous model**

On the NT-505, there are two types of DSD filters and another five types of PCM digital filters, allowing you to apply the filter that best matches the file format or type of music you're listening to. The filter can be changed at the touch of a button on the remote control, allowing you to enjoy the different sonic nuances of each filter.

PCM digital filters

- Sharp Roll Off: FIR filter with a steep roll-off that sharply cuts signals outside the audio band
- Slow Roll Off: FIR filter with a slow roll-off that gently cuts signals outside the audio band
- Short Delay - Sharp: Short delay filter with a steep roll-off that sharply cuts signals outside the audio band
- Short Delay - Slow: Short delay filter with a slow roll-off that gently cuts signals outside the audio band
- Low Dispersion: Short delay filter with low dispersion that cuts signals outside the audio band.
- Off

*When receiving signals at 352.8 kHz, 384 kHz or higher, the digital filter will be disabled during processing regardless of the above setting.

DSD digital filter

- Narrow: Cut-off frequency of 39kHz (at 2.8M), 78kHz (at 5.6M), 156kHz (at 11.2M) or 312kHz (at 22.5M)
- Wide: Cut-off frequency of 76kHz (at 2.8M), 152kHz (at 5.6M), 304kHz (at 11.2M) or 608kHz (at 22.5M)

• Isolated digital and analogue sections


In order to suppress interference between the digital and analogue sections, the NT-505 employs an independent power supply and ground circuit, so eliminating cross-interference in the signal path where digital and analogue sections connect. A digital isolator is employed at the input section to eliminate noise originating from any connected digital sources, including noise that is generated from the computer via USB, power line and the ground path. This isolation circuit also makes a significant improvement in the signal-to-noise ratio as well as the final sound quality.

• Dual high-capacity toroidal-core power transformers

The dual monaural theme continues. Two over-sized high-capacity toroidal-core power transformers are employed in the NT-505, supplying stable, individual current sources for each of the left and right channels. This means neither channel will be affected by changes in the power consumption of the other during digital processing.

**Further enhanced analogue output circuitry****• Unique TEAC-HCLD output buffer amp circuits**

At the heart of analogue section are TEAC-HCLD (High Current Line Driver) buffer amp circuits, designed to enhance current supply. Each channel employs two identical buffer amps that process differential drive for balanced output, and parallel drive for unbalanced output. By increasing the current supply to the buffer amp section, the analogue audio signal is passed to the next step without any loss of dynamism.

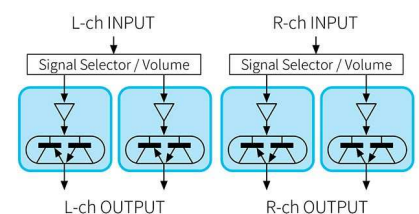
**• TEAC-QVCS high-precision volume control with four circuits**

The NT-505 is also a superb pre-amplifier, thanks to its combination of outstanding analogue processing performance, a wide range of analogue/digital inputs, and fixed/variable level XLR (balanced) and RCA (unbalanced) outputs. These allow you to build a fully-fledged hi-fi system

Supplemental to New Product Information (SNPI)

around the NT-505 with a stereo amplifier/pair of monaural power amplifiers and floorstanding speakers, or a simplified system based on a pair of active speakers

The TEAC-QVCS (Quad Volume Control System) is a precise volume control design incorporated in the pre-amp section. This circuit employs four sets of variable gain-amps controlling volume for left, right, positive and negative (L+, L-, R+, R-). Each variable gain-amp is located on a simplified signal path which helps eliminate interference noise by creating a shorter signal path.



In addition, the TEAC-QVCS provides precise volume control in 0.5dB steps in 'dB' display mode, or 100 steps in 'step' display mode.

- **Ground-separate headphone drive mode**

Applying TEAC-HCLD (which comprises four output transistors in each of the left and right channels) for headphone amplification delivers an excellent sound quality via the conventional 1/4" stereo TRS jack. Furthermore, by driving these transistors in parallel when a single-ended headphone is connected, stronger driving power than conventional single-ended headphone amps provide can be delivered to the headphones. In conventional headphone listening, it is configured to operate in Class-A, despite nominally being a Class-AB amplifier.

The NT-505 allows you to bring out the potential of any type of headphones including 600Ω high-impedance examples.

Moreover, the ground-separate drive mode completely separates the grounds of the left and right channels from the amp section to the output jacks. Channel separation, which is crucial for headphone listening is significantly improved, achieving a clear soundstage with good transparency.

- **Full-dot OLED display with excellent visibility**

A high contrast full-dot OLED (organic EL display) with 4-step dimmer is employed, for excellent visibility. Even better, a highly legible, large font size allows you to easily verify the volume level, input source and other information, even when sat at a distance.

Obsessively well-designed

- **Full-metal body for functionality and beauty**

Just as with the successful Reference 503 series, the NT-505 employs aluminum-alloy panels - including iconic side guard-bars - and a robust metal chassis with a compact A4-size footprint* that completely matches with the 500 series and the new CG-10M master clock generator. The full metal construction isn't just beautiful, it's also functional. It's highly effective at isolating the internal circuits from electromagnetic noise.

*Not including connectors, knobs and other protruding parts.

- **Symmetrically laid out XLR and RCA output jacks**

The NT-505 is equipped with both balanced and unbalanced analogue audio outputs. A pair of XLR connectors and another pair of RCA connectors - each gold-plated - are symmetrically laid out, hinting at the dual monaural arrangement inside, and allowing a wide range of possible audio configurations. A wide-spaced pitch layout for the RCA outputs accommodates professional grade plugs with large-diameter shells. The NT-505 has a total of 5 digital inputs: USB audio, coaxial, optical on the rear panel, and a combination jack on the front panel (for coaxial and optical, supporting PCM 24/192 and DSD64 in DoP format).

Supplemental to New Product Information (SNPI)**● Free TEAC HR Audio Player software for DSD512 playback on both Windows and Mac**

The next-generation Hi-Res formats, DSD512 (22.5MHz) and PCM 768kHz/32-bit are supported via the TEAC HR Audio Player software for Windows and Mac. This software guarantees the best available playback quality with any combination of audio format and computer configuration via a single USB cable. All the user has to do is choose the NT-505 from the pull-down menu showing target output devices. The TEAC HR Audio Player is downloadable from TEAC's web site, and is completely free to use.


* Use on a Windows computer requires a free driver, also provided by TEAC.

**● Free TEAC HR Streamer app for iOS/Android devices**

Supporting Hi-Res audio formats up to 5.6MHz DSD and 192kHz PCM, this free app for iOS and Android devices allows you to control wireless streaming music playback from a device, NAS, computers and the Internet, along with rich graphic information such as album artwork.

* iOS version is available now. Android version is scheduled for later release.

* Wi-Fi network is required to use the App.

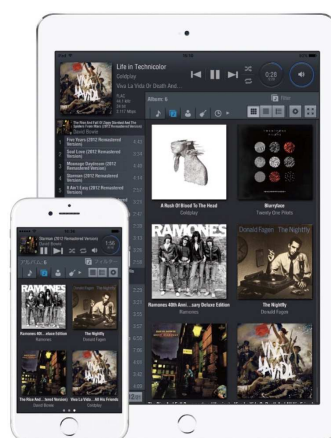

Album artwork: courtesy of **onkyo music**
© Warner Music Japan

■ List of features

- Hi-Res audio playback supporting DSD512 (22.6MHz) and PCM 768kHz/32-bit PCM
- Dual monaural circuit design with a high-end AKM VERITA AK4497 DAC on each channel
- Supports MQA decoding and TIDAL and Qobuz music subscription services, and is Roon Ready
- DSD128 (5.6MHz) and PCM 192kHz/24-bit Network streaming from NAS/PC
- 5 types of PCM digital filters and 2 types of DSD digital filters
- Up-conversion up to 24.5MHz DSD and 384kHz/32-bit PCM
- Dual on-board clocks for 44.1kHz and 48kHz frequencies, and 10MHz external clock input
- Bluetooth® receiver supporting LDAC™ and Qualcomm® aptX™ HD
- TEAC-HCLD output buffer circuit and TEAC-QVCS volume control for high quality sound
- Dual toroidal-core power transformers
- Digital Isolator for separated digital and analogue sections

Supplemental to New Product Information (SNPI)

- 1/4" (6.3mm) stereo TRS jack supporting ground-separate drive
- "Bulk Pet" USB transferring technology with four transfer modes for various sound characters*1
- USB audio port for Hi-Res audio input from Windows/Mac
- Coaxial and optical digital inputs on both front and back
- Front USB port supporting Hi-Res playback from USB flash drive
- Analogue outputs with balanced XLR and conventional unbalanced RCA outputs
- High-contrast full-graphic organic EL display with dimmer
- Full-metal body with an A4-sized footprint
- Free TEAC HR Audio Player for DSD512 and PCM32/768 playback
- Free TEAC HR Streamer app for iOS/Android devices
- Compliant with RoHS

*1 "Bulk Pet" is a registered trademark of Interface Corporation.

■ Specifications

Supported formats

USB input	
PCM	16/24/32-bit, 44.1/48/88.2/96/176.4/192/352.8/384/705.6/768 kHz
DSD	2.8/5.6/11.2/22.5 MHz
Coaxial digital input	
PCM	16/24-bit, 32/44.1/48/88.2/96/176.4/192 kHz
DSD	2.8MHz (supported with 176.4kHz/24-bit DoP format)
Optical digital input	
PCM	16/24-bit, 32/44.1/48/88.2/96/176.4/192 kHz
DSD	2.8 MHz (supported with 176.4kHz/24-bit DoP format)

DAC section

USB DAC	Asahi Kasei Microdevices AK4497 × 2
Up-conversion	up to 384kHz/32-bit PCM, 22.5MHz DSD
Digital filters	
PCM filters	Sharp Roll Off, Slow Roll Off, Short Delay Sharp, Short Delay Slow, Low Dispersion, off
DSD cutoff frequencies	Narrow: 39kHz (at 2.8M), 78kHz (at 5.6M), 156kHz (at 11.2M) or 312kHz (at 22.5M) Wide: 76kHz (at 2.8M), 152kHz (at 5.6M), 304kHz (at 11.2M) or 608kHz (at 22.5M)

LAN section

Connector	RJ-45 × 1 (100Base-T)
MQA Decoder	Built-in

Audio inputs

USB	USB B port, USB 2.0, asynchronous mode transfer, bulk transfer
Compatible Software	TEAC HR Audio Player (Windows, Macintosh)
COAXIAL digital (rear)	RCA pin × 1 (gold-plated)
Input level	0.5 Vp-p
Input impedance	75 Ω
Optical digital (rear)	TOS-link × 1
Input level	−24.0 dBm to −14.5 dBm peak
Coaxial digital (front)	1/8" (3.5mm) mini* × 1 (combined with optical digital input, detected automatically)
Input level	0.5 Vp-p
Input impedance	75 Ω * 1/8" Mini - RCA conversion cable included.
Optical digital (front)	1/8" Mini Optical* × 1 (combined with coaxial digital input, detected automatically)
Input level	−24.0 dBm to −14.5 dBm peak
USB (front)	USB A port
Supported media	USB Flash Drive
Bluetooth®	
Bluetooth® version	4.0
Output class	Class2 (Range: approx. 33ft / 10m)
Supported profiles	A2DP, AVRCP
Content protection	SCMS-T
Supported codec	LDAC™, Qualcomm® aptX™ HD, aptX™, AAC, SBC
No. of paired device	maximum 8 devices

Supplemental to New Product Information (SNPI)Audio outputs

XLR balanced	XLR × 1 pair (gold-plated)
Output level	Fixed (0 dB), fixed (+6 dB), variable, output off (selectable)
Maximum output level	2.0 Vrms (1 kHz, full scale, into 10 kΩ, when set to fixed (0 dB)) 4.0 Vrms (1 kHz, full scale, into 10 kΩ, when set to fixed (+6 dB)) 12.0 Vrms (1 kHz, full scale, into 10 kΩ, when set to variable)
Output impedance	188 Ω
RCA unbalanced	RCA pin × 1 pair (gold-plated)
Output level	Fixed (0 dB), fixed (+6 dB), variable, output off (selectable)
Maximum output level	2.0 Vrms (1 kHz, full scale, into 10 kΩ, when set to fixed (0 dB)) 4.0 Vrms (1 kHz, full scale, into 10 kΩ, when set to fixed (+6 dB)) 6.0 Vrms (1 kHz, full scale, into 10 kΩ, when set to variable)
Output impedance	150 Ω

Headphone outputs

Connector	1/4" (6.3mm) Stereo TRS jack × 1 (gold-plated)
Maximum output	500 mW + 500 mW (into 32 Ω)
Supported impedances	16–600 Ω

Clock section

Internal clock	
Type	Crystal oscillator
Number of clocks	2 (44.1kHz and 48kHz)
External clock input	
Connector	BNC (gold-plated)
Input frequency	10 MHz
Input impedance	50 Ω
Input level	Rectangle wave: equivalent to TTL levels Sine wave: 0.5 to 1.0 Vrms

Audio performance

Frequency Response	10 Hz – 80,000 Hz (+1/–3 dB, 192kHz PCM input, RCA output, digital filter off)
Total harmonic distortion	0.002% or less (192kHz PCM input, RCA output, digital filter off)
S/N ratio	110 dB or higher (192kHz PCM input, RCA output, digital filter off)

Operating systems


Windows	Windows 10 Windows 8.1 (32-bit, 64-bit) Windows 8 (32-bit, 64-bit) Windows 7 (32-bit, 64-bit)
Macintosh	High Sierra (macOS 10.13) Sierra (macOS 10.12) El Capitan (OS X 10.11) Yosemite (OS X 10.10) Mavericks (OS X 10.9) Mountain Lion (OS X 10.8) Lion (OS X 10.7)

General

Power supply	AC 120V 60Hz (US/Canada), AC 220–240V 50Hz (UK/Europe)
Power consumption	20 W (0.4 W in standby)
Overall dimensions	290 × 81.2 × 248.7 mm / 11.4" × 3.2" × 9.8" (W × H × D, including protrusions)
Weight	3.9 kg / 8.6 lbs.

Included accessories

Power cord, RCA mini plug adapter cable, remote control (RC-1330),
2 AAA batteries for remote control, Owner's Manual (with warranty)

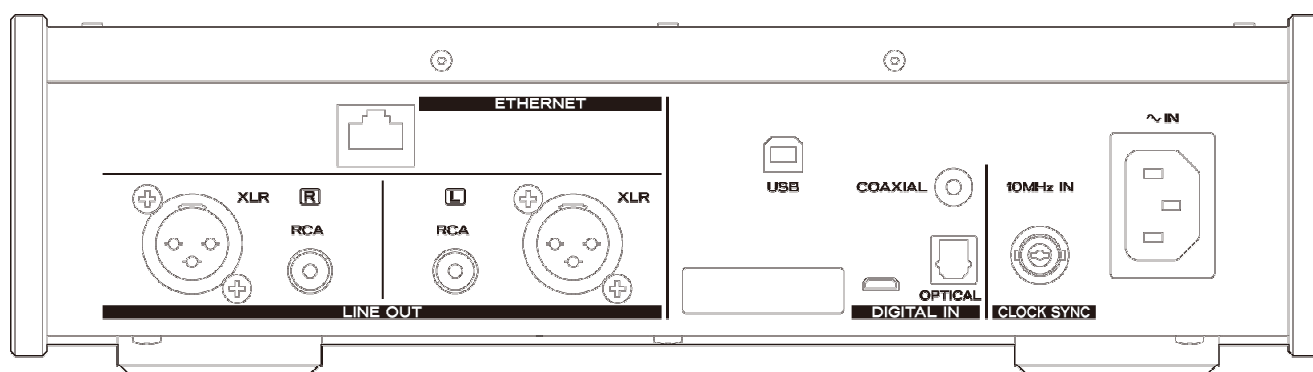Supplemental to New Product Information (SNPI)**■ Rear panel****■ Up-conversion table**

Input Source		Up-convert setting					
Coax/Opt	USB	Off	2Fs	4Fs	8Fs	DSD256	DSD512
Input Frequency (Hz)		Up-converted Frequency (Hz)					
32k	–	32k	64k	128k	256k	8.0M	16M
44.1k	44.1k	44.1k	88.2k	176.4k	352.8k	11.2M	22.5M
88.2k	88.2k	88.2k	88.2k	176.4k	352.8k	11.2M	22.5M
176.4k	176.4k	176.4k	176.4k	176.4k	352.8k	11.2M	22.5M
–	352.8k	352.8k	352.8k	352.8k	352.8k	11.2M	22.5M
–	705.6k	705.6k	705.6k	705.6k	705.6k	11.2M	22.5M
48k	48k	48k	96k	192k	384k	12.2M	24.5M
96k	96k	96k	96k	192k	384k	12.2M	24.5M
192k	192k	192k	192k	192k	384k	12.2M	24.5M
–	384k	384k	384k	384k	384k	12.2M	24.5M
–	768k	768k	768k	768k	768k	12.2M	24.5M

No conversion

Maximum up-conversion rate is 8Fs.

Supplemental to New Product Information (SNPI)**■ Comparison with previous models**

	NT-505	NT-503
USB DAC	AK4497 × 2 (L/R)	AK4490 × 2 (L/R)
DSD	22.5MHz maximum	11.2MHz maximum
PCM	768kHz/32-bit maximum	384kHz/32-bit maximum
Up-conversion	24.5MHz DSD (DSD 256, 512) PCM: 384kHz/32-bit maximum (2fs, 4fs, 8fs)	DSD: 12.2MHz maximum (DSD 256) PCM: 384kHz/32-bit maximum (2fs, 4fs, 8fs)
PCM filters	Digital filters ● Sharp Roll Off ● Slow Roll Off ● Short Delay Sharp ● Short Delay Slow ● Low Dispersion ● Off	Digital filters ● Sharp Roll Off ● Slow Roll Off ● Short Delay Sharp ● Short Delay Slow ● Off
DSD filters	Digital filters ● Cut Off: Narrow 39 kHz (when 2.8 MHz) 78 kHz (when 5.6 MHz) 156 kHz (when 11.2 MHz) 312 kHz (when 22.5MHz) ● Cut Off: Wide 76 kHz (when 2.8 MHz) 152 kHz (when 5.6 MHz) 304 kHz (when 11.2 MHz) 608 kHz (when 22.5 MHz)	Digital filters ● Cut Off 50 kHz ● Cut Off 150 kHz
Dual mono	Yes	Yes
TEAC HCLD circuit (current buffer circuit)	Yes	Yes
TEAC QVCS circuit (high-precision volume)	Yes	Yes
Line/balanced outputs	Yes	Yes
Line parallel/unbalanced outputs	Yes	Yes
High-precision dual clock	Yes	Yes
External clock input (10 MHz)	Yes	Yes
Preamplifier function	Yes	Yes
Bulk Pet transmission	Yes	—
MQA decoder	Yes	—
Line output level switching	● Fixed (0 dB) ● Fixed (+6 dB) ● Variable ● Off	● Fixed (0 dB) ● Fixed (+6 dB) ● Variable ● Off
Front digital input	Yes (Combined coaxial/optical mini jack)	Yes (Combined coaxial/optical mini jack)
Bluetooth® input (supported codecs)	LDAC™, aptX™ HD, AAC, SBC	aptX™, AAC, SBC
Headphone amplifier circuit	Current-strengthening circuit	Current-strengthening circuit
Headphone drive method	● Ground separate	● Parallel unbalanced
Headphone output jack	● 1/4" (6.3mm) Stereo TRS × 1	● 1/4" (6.3mm) Stereo TRS × 1
Remote control	Yes	Yes