

AV Receiver RX-A870



7.2-channel AVENTAGE AV receiver that combines high power with a huge range of great features.



















HDCP22





Zone2



CINEMADSP 3D







terminal, USB port, Audio input terminal, YPAO optimised microphone jack, and more





SCENE









- 7-channel powerful surround sound
 100 W per channel (8 ohms, 20 Hz-20 kHz, 0.06 % THD, 2-ch driven)
 160 W per channel (4 ohms, 1 kHz, 0.9 % THD, 1-ch driven)
 160 W per channel (8 ohms, 1 kHz, 10 % THD, 1-ch driven)
- Dolby Atmos® and DTS:X™ support
 Extra 5th foot with Anti-Resonance Technology (A.R.T. Wedge) to reduce Vibration
- Aluminium front panel offers visual and aural benefits
 Advanced design feet enhance strength and vibration resistance NEW
- Selected high quality parts to achieve optimum audio performance
 Pure Direct for pure Hi-Fi sound quality enjoyment
- High quality Volume IC and Independent Pure Power Supply
 Low jitter PLL circuitry helps optimise sound imaging
- Assignable amplifiers for front speaker bi-amp connection
 Intelligent assignable amplifiers for Surround Back <-> Front Presence or Zone 2
- . DSD 2.8 MHz / 5.6 MHz audio playback • FLAC or WAV 192 kHz / 24-bit audio playback
- Apple Lossless audio playback
 Compressed Music Enhancer for Bluetooth®
- · Phono input for vinyl playback

Video Features

- Latest HDMI® (8 in / 2 out) with 4K Ultra HD Full Support (4K / 60p [4:4:4]), HDR Video including Dolby Vision and Hybrid Log-Gamma, and BT.2020 pass-through
 *Dolby Vision and Hybrid Log-Gamma will be available via future firmware u

 • K video upscaling from analogue and HDMI® input
- High quality video processing with precise deinterlacing
 Motion adaptive and edge adaptive deinterlacing
- Multi-cadence (incl. 3-2 pull-down) detection

Advanced Features

- MusicCast for audio enjoyment in every room
 Bluetooth for wireless music streaming (SBC / AAC)
- Bluetooth Output for Convenient Music Streaming
 DAB/DAB* tuner for enjoying high quality digital radio broadcasts NEW (European and Australia models only)
- DAB/DAB* and FM tuners both have 40 station preset memories NEW (European and Australia models only)
 Network functions

- Wi-Fi Built-in (802.11b/g/n) Easy Wi-Fi setup i.e. iOS Wi-Fi settings sharing, WPS etc.

- Lasy Mi-TiseLing Let. 103 Wini-TiseLing Shaffing, WY-3 etc.
 AirPlay® allows music streaming from Mac, PC, iPod®, iPhone®, iPad®
 AV Controller app for operating various functions from iOS or Android smartphones and tablets
 Access to: Internet Radio (airable radio): MP3, WMA Streaming Services (Spotify®*, Napster®*, Pandora®*,
 Tidaf*, Deczer*, Ouboz*, JUKE®*) IEBUT Streaming service availability varies by region.

 Music files on PC / NAS: WAV, MP3, WMA, AAC, FLAC, Apple Lossless, AIFF, DSD
- DLNA® 1.5 certified
- Triggered Auto Playback with MusicCast devices NEW

 Gapless playback compatibility allows play without interruption
- Front panel USB Digital Connection for USB thumbdrives
 Advanced GUI on-screen display with HD capability
- HDMI® CFC with versatile control from AV Receiver remote control.
- YPAO™ R.S.C. (Reflected Sound Control) sound optimisation with multi-point measurement

- Streaming service availability depends on regions. DAB tuner only for European and Australia models. *TIDAL / Deezer will be available via future firmware update. • HDMI® front panel input for devices such as camcorders and digital cameras
 - Ability to change HDMI® input while in Standby Through mod
 - Video out feature (for TUNER / USB / NET / Bluetooth / AUDIO)
 - · SCENE buttons with direct power on

 - Selectable BD/DVD, TV, FM/AM radio and Net Radio stations, tune-in NAS NEW
 Quick and simple to use - HDMI® CEC powers up compatible TVs and Blu-ray Disc™ players

Surround Realism

- HD Audio decoding with CINEMA DSP 3D (17 DSP programmes)
 Compressed Music Enhancer with CINEMA DSP

VIRTUAL

- Dialogue Lift ensures that dialogue comes from the centre of the screen
 Dialogue Level Adjustment for proper sound balance with dialogue and vocals
- Virtual Presence Speaker function for CINEMA DSP 3D surround without Front Presence Speakers
 Virtual CINEMA FRONT provides virtual surround sound with 5 speakers in front
- Virtual Surround Back Speaker for playing 7.1-channel content with a 5.1-channel system
 YPAO™ Volume to ensure natural sounds even at low volume

- Zone Extra Bass for more powerful bass sound in another room (Zone 2) NEW
 Zone Volume Equalizer for optimum sound balance in another room (Zone 2) NEW
- Extra Bass enriches the powerful bass sound even with small speakers
- SILENT CINEMA to enjoy surround sound with headphone
- Two subwoofer outputs (simultaneous outputs)

Versatile Zone Control

- · Pre-out terminal for Zone 2 with volume control
- Versatile Zone 2 Control i.e. Power / Volume / Control by App
- Zone mono, Zone volume, Zone tone controls, Zone balance and Zone audio delay NEW
- Remote input/output
- Programmable +12V trigger output

Eco-Friendly Design

- ECO mode operation for about 20 %* less power consumption
 "Compared to power consumption when ECO mode is off (Yamaha measurement)
 Auto power standby function with variable time setting
- With an advanced energy saving design, This AV receiver achieves a low power consumption of not more than two watts when in Network Standby mode.



The RX-A870 offered with black, titanium finish available in some





AV Receiver RX-A870

Enter a New World of Sound with Dolby Atmos® and DTS:XTM

These sound technologies transport you from an ordinary moment into an extraordinary experience with captivating, multidimensional sound that fills your room with amazing richness and depth. These sound technologies allow for music, people and objects to come alive in breathtaking detail and flow in precise choreography all around you, making you feel like you are right in the middle of the story.



MusicCast Compatibility with Zone 2 Link Master Function

MusicCast employs a high performance wireless network to deliver music and audio enjoyment. It can stream digital music content from your smartphone, PC or NAS to other MusicCast devices and external devices such as a TV or Blu-ray Disc™ player connected to the RX-A870. In addition, Zone 2 Link Master lets you enjoy the sound playing in Zone 2 in other MusicCast rooms, even when the main zone is powered off.



YPAO™ with R.S.C., and Multipoint Measurement, and YPAOTM Volume


YPAO-R.S.C. analyses the room acoustics and your system, then calibrates audio parameters to achieve optimum sound at any of eight listening positions. It employs Reflected Sound Control to correct early reflections for studio-quality sound. YPAO Volume automatically adjusts the high and low frequency levels at any volume level so that you hear natural sounds even at low volume.



Main Specifications

Audio Section	
Rated Output Power (8 ohms, 20 Hz-20 kHz, 0.06 % THD, 2-ch driven)	
Front L/R	100 W + 100 W
Rated Output Power (4 ohms, 1 kHz, 0.9 % THD, 1-ch driven [European Model])	
Front L/R	160 W + 160 W
Maximum Effective Output Power (8 ohms, 1 kHz, 10 % THD, 1-ch driven)	
Front L/R	160 W + 160 W
Centre	160 W
Surround L/R	160 W + 160 W
Surround Back L/R	160 W + 160 W
Dynamic Power/Ch (Front L/R, 8/6/4/2 ohms)	130 / 170 / 195 / 240 W

General		
Standby Power Consumption		
HDMI Control Off, Standby Through Of	ff 0.1 W	
HDMI Control, Standby Through On, N	etwork Standby Off 1.1 W	
Network Standby On	1.8 W (Wireless)	
Dimensions (W x H x D)	GBT destination;	
	435 x 171 x 382 mm (with antenna up: 435 x 234 x 382 mm)	
	17-1/8" x 6-3/4" x 15" (with antenna up: 17-1/8" x 9-1/4" x 15")	
	Other destination;	
	435 x 171 x 380 mm (with antenna up: 435 x 234 x 380 mm)	
	17-1/8" x 6-3/4" x 15" (with antenna up: 17-1/8" x 9-1/4" x 15")	
Weight	10.5 kg; 23.4 lbs.	

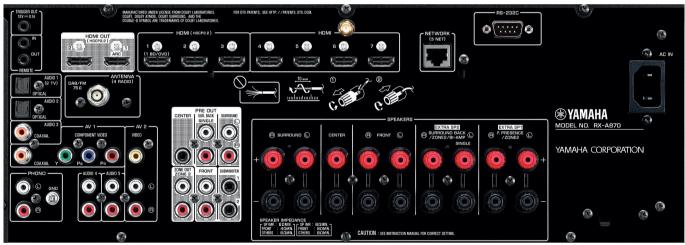

European Model

Extensive Connections

Inputs	
HDMI*1 (Audio Input Assignable*2, HDMI1,2,3:HDCP2.2 compatible)	8
Network (Ethernet / Wi-Fi)	1 / 1
USB*1	1
Radio Antenna*3 (FM / AM)	1 / 1
(European and Australia models: FM / DAB)	1 / 1
Optical Digital	2
Coaxial Digital	2
Analogue Audio*1 (incl. Mini Jack Input and Phono)	5
Component Video (Audio Input Assignable)	1
Composite Video*1	1

Outputs	
HDMI (HDCP2.2 compatible)	2 (simultaneous)
Pre Out	7.2-ch
Speaker*4/*5/*6	7-ch / 9 ter
Subwoofer	2 x mono
Headphone Jack*1	1

^{*1} Including front panel terminals.
*2 Front HDMI input is not assignable.
*3 The shape of the FM antenna terminal varies according to area.

Others	
Zone 2 Audio Out	1
Remote In/Out	1 / 1
+12V / Total 0.1A Trigger Out	1
RS-232C	1
Terminal for Detachable Power Cable	1

*4 Assignable for surround back L/R to bi-amp (front L/R) or Zone 2.

• AirPlay works with iPhone, iPad, and iPod touch with iOS 4.3.3 or later, Mac with OS X Mountain Lion or later, and Mac and PC with iTunes 10.2.2 or later. Supports iOS 7 or later for setup using Wireless Accessory Configuration. "Made for iPhone," and "Made for iPhone and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this developer to meet Apple performance standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance. AirPlay, iPad, iPhone, iPod, iPod nano, and iPod touch are trademarks of Apple Inc., registered trademarks owned by Bluetooth's (in. and any use of such marks by Yamaha Corporation is under licence. Other trademarks and trade names are those of their respective owners.

* The Wi-Fi CERTIFIED logo is a certification mark of the Wi-Fi Aliance. The Wi-Fi Protected Setup Identifier Mark is a mark of the Wi-Fi Aliance. "Wi-Fi," Wi-Fi Protected Setup," Wi-Fi Direct" and "Mirasast" are marks or registered trademarks of the Spotify Group. * Pandards of the Spotify Group.

GBFARLTK-RXA870

^{*5} Extra speaker terminals are assignable to Zone 2 or Presence.
*6 Banana-plug compatible speaker terminals are available in some areas.